
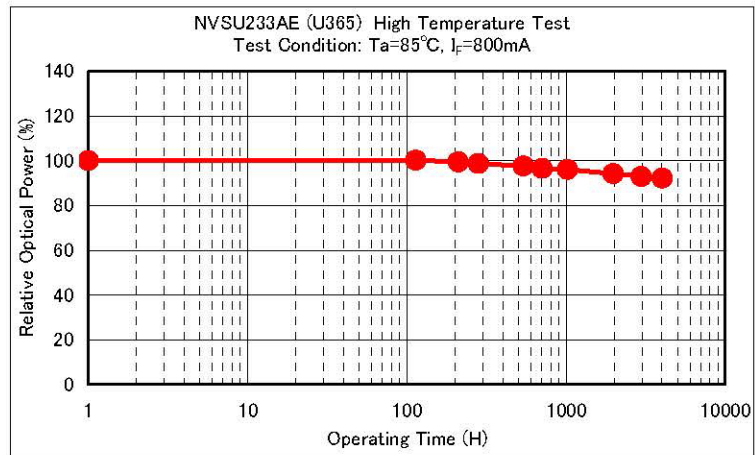
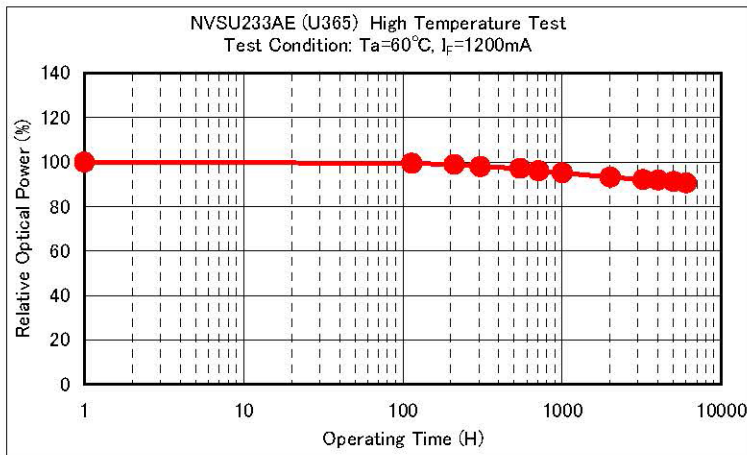
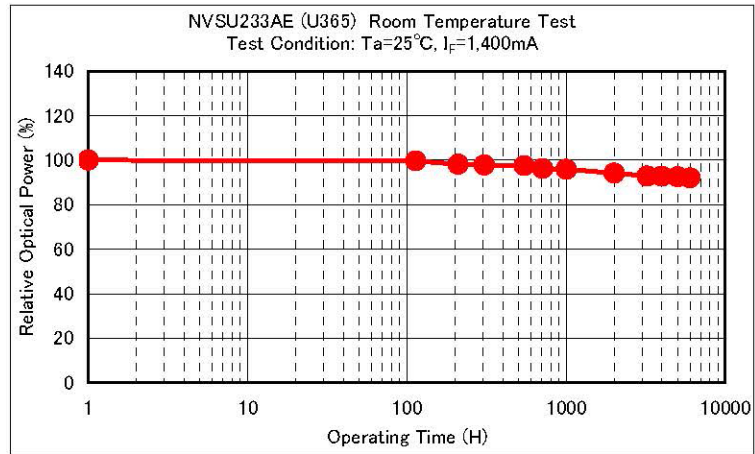


Reference





NVSU233AE (U365) Reliability Results

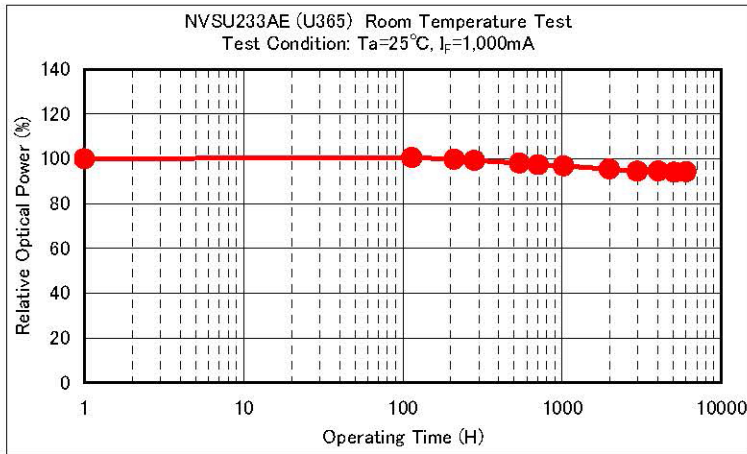

[Test Condition]




- Using typical thermal designed PWB
- PWB: Al $t=1.5\text{mm}$
- $R_{thj-a} \cong 14^{\circ}\text{C/W}$

NVSU233AE (U385) Reliability Results

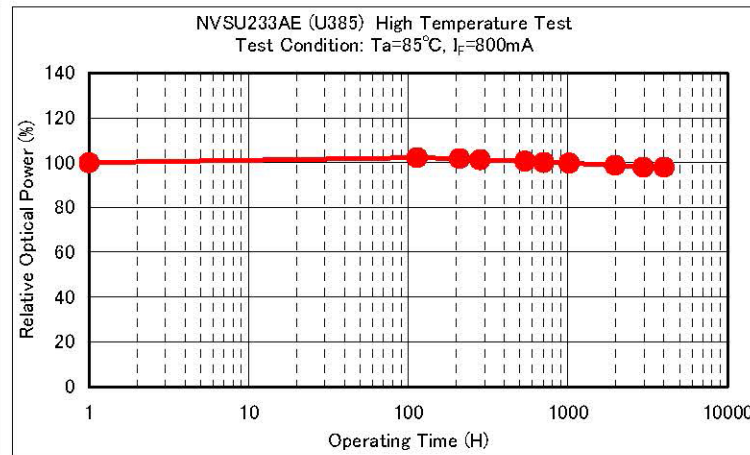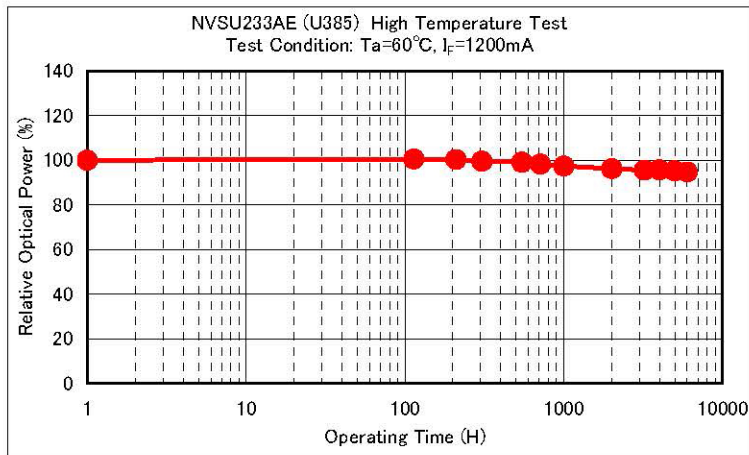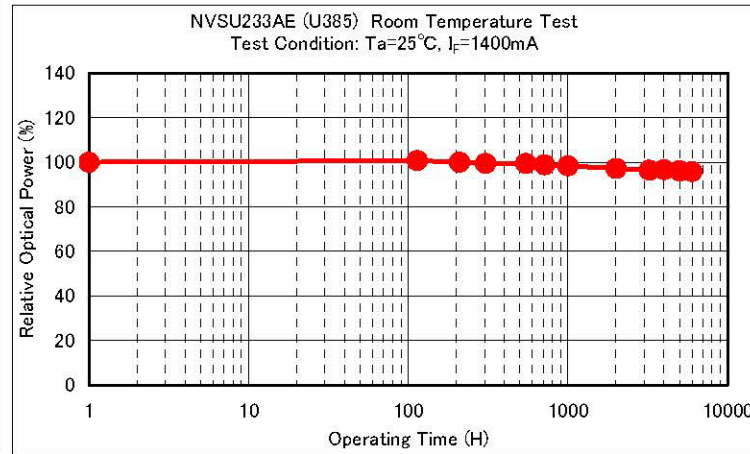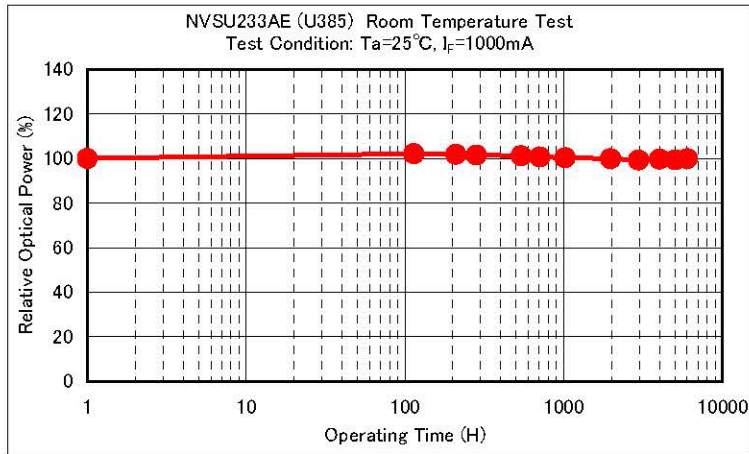

- [Test Condition]
- Using typical thermal designed PWB
 - PWB: Al t=1.5mm
 - Rthj-a ≒ 14°C/W

NVSU233A (U405) Reliability Results

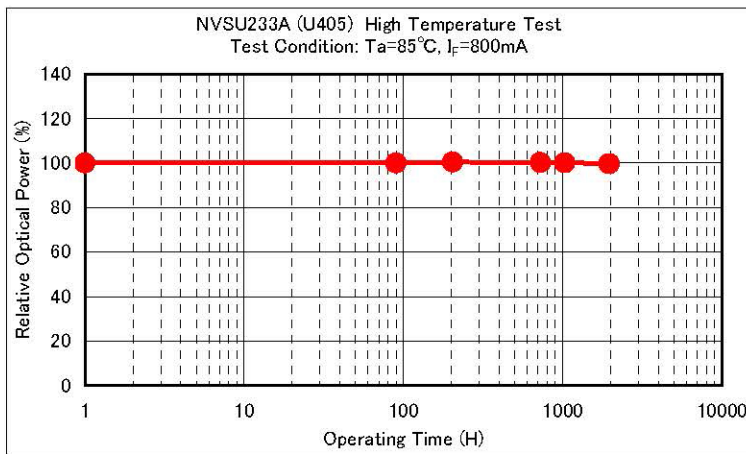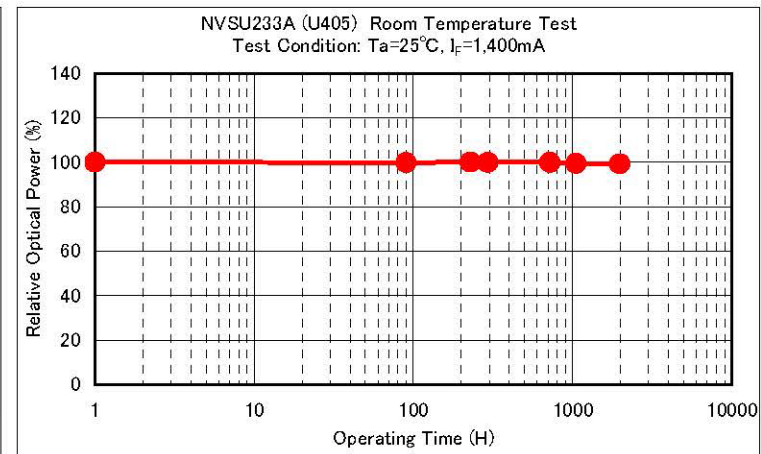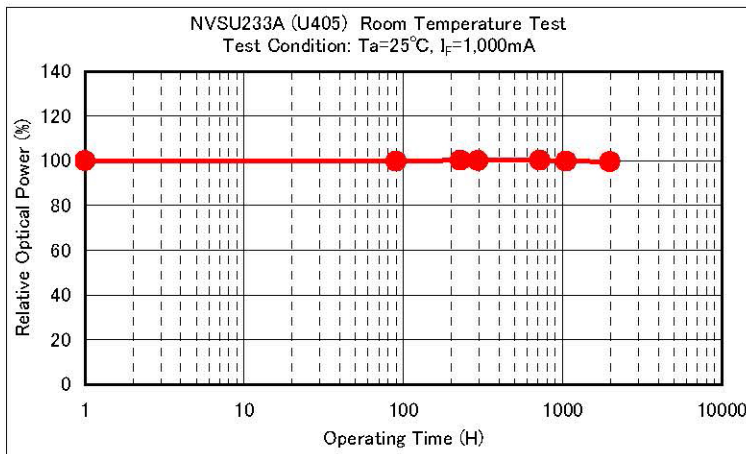

[Test Condition]

- Using typical thermal designed PWB
- PWB: Al $t=1.5\text{mm}$
- $R_{thj-a} \cong 14^{\circ}\text{C/W}$

NVSU333A Reliability Results

